


RK-2910

Brush DC Motor

Application : Automobile Electric Tailgate Push Rod

用途：汽車後尾門推杆

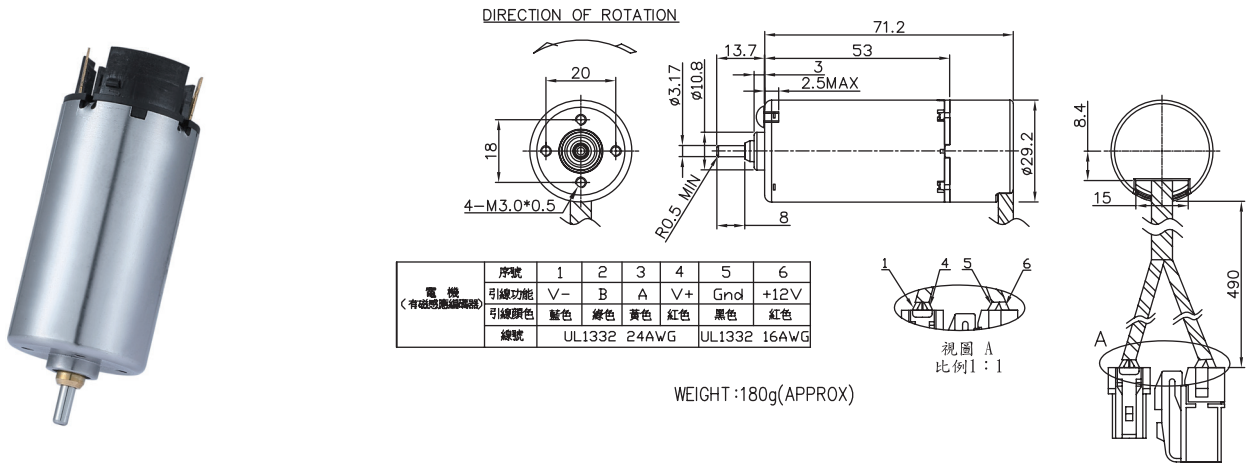

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
	OPERATING RANGE	NOMNAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	CURRENT	TORQUE		
			rpm	A	rpm	A	Kg-cm	mN-m	W	%	A	Kg-cm	mN-m
RK-2910VB-2832S-R-CE-IE	10.0 - 14.0	12.0V CONSTANT	6600	0.45	5882	2.68	0.38	37	23.19	73	18.01	3.04	298
RK-2910VB-1763-R-CE-IE	12.0 - 24.0	24.0V CONSTANT	7000	0.23	6177	1.34	0.39	38	24.54	77	8.76	2.93	287

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output,performance and EMC solution.

